


T8 EXTERNAL DRIVER LED



Driver:
UL US
E477240



**WORKS WITH
EXTERNAL LED
DRIVER**
(24V Constant Voltage)
Sold Separately

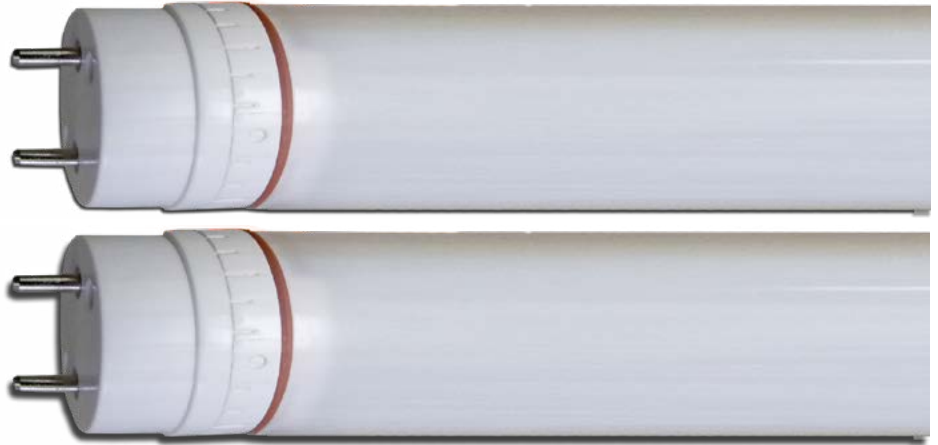

IDEAL FOR

Service & Multi-Deck: Meat, Seafood, Dairy, Deli, Prepared & Frozen Foods, Floral, Produce, Bakery, Salad Bars & Ice Cream/Gelato

SPECIFICATIONS

G13 Bi-Pin Rotating & Locking End-Caps
External Power Supply (External Driver)
IP55
Replaces T8 Fluorescent Tubes
Double End Power Input (Polar)
185° Beam Angle
DC 24V
UL Conforming
High Brightness/ 80 CRI
Up to 60% Energy savings
Average 50,000 Hours Life Span
5 Year Warranty



Size	Model Number	Watts	Type	Length (mm) (Nominal)	Length (in) (Nominal)	Replaces Fluorescent	Lumens	Lumens per Watt	Color
2ft	T8-PL-24C+*	9	Canopy	600	24	F17 T8	880	110	Platinum
3ft	T8-PL-36C+*	14	Canopy	900	36	F25 T8	1582	113	Platinum
4ft	T8-PL-48C+*	18	Canopy	1200	48	F32 T8	2070	115	Platinum
5ft	T8-PL-60C+*	22	Canopy	1500	60	F40 T8	2508	114	Platinum
3ft	T8-PL-36S+*	7	Shelf	900	36	F25 T8	791	113	Platinum
4ft	T8-PL-48S+*	9	Shelf	1200	48	F32 T8	1035	115	Platinum

* T8-PL-XXC+ (& S+) Replaces Previous Model Number: T8-PL-XXC (& S)
Stock with original model numbers available while supplies last



www.promolux.com • info@promolux.com • 1.250.743.1222 • 1.800.519.1222

Specifications subject to change without notice. Contact us for more information.