

PROMOLUX) DOOR TUBE LED 24V







Introducing the Promolux Door Tube LED – the ultimate solution for upgrading your Door Tube lighting system in medium temperature upright coolers and low temperature upright freezers. Engineered to deliver superior performance and flexibility, this fixture is crafted for diverse commercial applications requiring a linear light source.

Versatile Installation: Tailored for flexibility, the Promolux Door Tube LED seamlessly installs on flat surfaces, vertically or horizontally, precisely delivering illumination where needed.

Targeted Replacement: Specifically tailored to replace Door Tube lighting systems, ensuring a smooth transition with enhanced efficiency and performance.

Single-Tube Setup: Streamlined for simplicity, this version is not linkable, making installation and operation straightforward and efficient. **AC Power Access:** Access to AC power is essential and 24V required for proper functioning, ensuring consistent and reliable performance.

- Double rows of LEDs arranged in a V-shape for a 180° beam angle.
- Three installation positions: Left Side, Middle, Right Side.

Specifications

- IP65
- CRI: > 80
- · High R9 & R12 Values
- Power Factor: > 0.9
- Rated Life: 50 000 hrs
- Voltage Input: 24V
- Chips: 2835
- Sizes: 60"(1500mm), 72" (1800mm)
- Colors: Platinum, Premium White, 6000K, and 4000K

Ideal for:

Cooler Doors Freezer Doors

Consult your Promolux supplier on custom solutions for your specific requirements.












DOOR TUBE LED

PEE2311 DOORTUBE

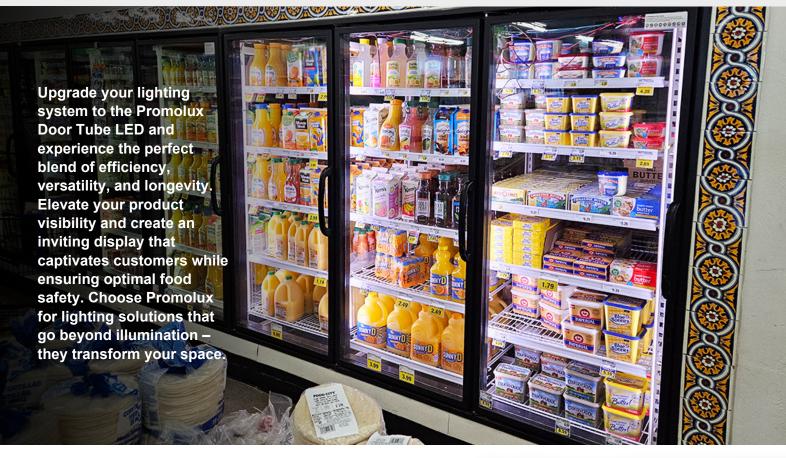

Enhanced Visibility:

The Door Tube LED ensures uniform and bright illumination, enhancing visibility and presentation of products within the cooler or freezer.

Energy Efficiency: With advanced LED technology, this fixture is energyefficient, contributing to reduced operational costs while maintaining superior lighting quality.



Longevity: Engineered for durability, the Promolux Door Tube LED is built to last, providing a reliable and long-lasting lighting solution for your commercial needs.

Size	Model number	Watts	Туре	Length (mm)	Length (inches)	Lumens	Lumens per watt	Color
5 ft	DTube-PL-60C+	22	Door	1500	60	2200	100	Platinum
6 ft	DTube-PL-72C+	28	Door	1800	72	2800	100	Platinum
5 ft	DTube-PW-60C+	22	Door	1500	60	2420	120	Premium White
6 ft	DTube-PW-72C+	28	Door	1800	72	3080	120	Premium White
5 ft	DTube-40-60C+	22	Door	1500	60	2200	100	4000K
6 ft	DTube-40-72C+	28	Door	1800	72	2800	100	4000K
5 ft	DTube-60-60C+	22	Door	1500	60	2420	120	6000K
6 ft	DTube-60-72C+	28	Door	1800	72	3080	120	6000K

Specifications subject to change without notice. Contact us for more information.