

PLUG-N-PLAY T8 LED

Type A & B Hybrid **Single End**









The Promolux Plug-n-Play T8 LED is designed specifically for merchandising and protecting fresh food while on display. It works as <u>either</u> a drop-in (type A) LED or line voltage (type B) LED.

As a drop-in LED, the Promolux Plug-n-Play T8 works with electronic T8 ballasts and easily installs with no wiring changes or added labor costs.

As a line voltage LED, the Promolux Plug-n-Play T8 uses direct AC line voltage (single end power input).

Specifications

- Type A & B
- G13 Bi-Pin Rotatable & Locking End-Caps
- Plug-n-Play (no wiring changes)
- Replaces T8 Fluorescent Tubes
- Works with **T8 Electronic Ballasts** (Type A LED)
- Single End Power Input (Polar) when Direct Wired (Type B LED)
- 134° Beam Angle
- UL Conforming
- IP54
- High Brightness / 80 CRI
- High R9/R12 Values
- Up to 60% Energy savings

Ideal for:

Service & Multi-Deck:

Meat

Seafood

Dairy

Deli & Prepared Foods

Floral

Produce

Bakery

Salad Bars

Ice Cream/Gelato










PLUG-N-PLAY T8 LED

PEE2401 PLUGNPLAYT8




How to install:

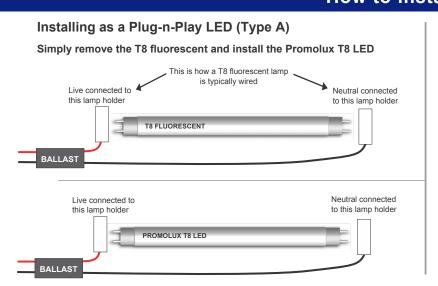

Installing as a Line Voltage (Type B)

- 1. bypass the ballast
- live and neutral wires must be connected to the same lamp holder

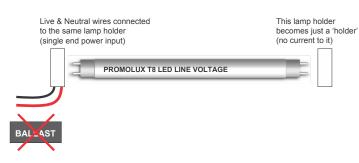

Size	Model number	Watts	Туре	Length (mm)	Length (inches)	Replaces Fluorescents	Lumens	Lumens per watt	Color
2 ft	T8PNP-PL-24C+	8	Full Brightness (Canopy)	600	24	F17 T8	880	110	Platinum
3 ft	T8PNP-PL-36C+	14	Full Brightness (Canopy)	900	36	F25 T8	1582	113	Platinum
4 ft	T8PNP-PL-48C+	18	Full Brightness (Canopy)	1200	48	F32 T8	2070	115	Platinum
5 ft	T8PNP-PL-60C+	22	Full Brightness (Canopy)	1500	60	F40 T8	2508	114	Platinum
3 ft	T8PNP-PL-36 S +	7	60% Brightness (Shelf)	900	36	F25 T8	791	113	Platinum
4 ft	T8PNP-PL-48 S +	9	60% Brightness (Shelf)	1200	48	F32 T8	1035	115	Platinum
5 ft	T8PNP-PL-60 S +	11	60% Brightness (Shelf)	1500	60	F40 T8	1243	113	Platinum

Specifications subject to change without notice. Contact us for more information.