

REGULAR LEDs

PROMOLUX



SLIMLINE BAR LED

Works with 24V Constant Voltage LED Driver (sold separately)



SLIMLINE SERIES


SPECIFICATIONS

- Connectable in a Series up to 150W
- IP65
- 226° Beam Angle
- CRI: > 88+
- High R9 & R12 Values
- Power Factor: > 0.9
- Voltage Input: 24V
- Chips: 2835
- Colors: Platinum (PL), Premium White+ (PW+), 3500K (35), 4000K (40)



2 WAYS TO CONNECT

LED to LED

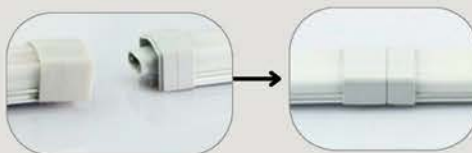

SB-CONNECT Connector /
Jumper Cable (optional purchase)



TECHNICAL DATA SPECS

Available Color Formulas: Platinum (PL), Premium White+ (PW+), 3500K (35), 4000K (40)

SIZE	MODEL #	COLORS	WATTS	TYPE	LENGTH (mm) (Nominal)	LENGTH (in) (Nominal)	LUMENS
1 ft	SB-XX-10C	PL, PW+, 35, 40	3.8	Full Brightness (Canopy)	254	10	320
2 ft	SB-XX-22C	PL, PW+, 35, 40	10.6	Full Brightness (Canopy)	549	22	950
3 ft	SB-XX-34C	PL, PW+, 35, 40	12	Full Brightness (Canopy)	849	34	1050
4 ft	SB-XX-46C	PL, PW+, 35, 40	14	Full Brightness (Canopy)	1149	46	1240
5 ft	SB-XX-58C	PL, PW+, 35, 40	22	Full Brightness (Canopy)	1449	58	1810
3 ft	SB-XX-34S	PL, PW+, 35, 40	5.8	60% Brightness (Shelf)	849	34	530
4 ft	SB-XX-46S	PL, PW+, 35, 40	6.8	60% Brightness (Shelf)	1149	46	660
5 ft	SB-XX-58S	PL, PW+, 35, 40	11	60% Brightness (Shelf)	1449	58	940

Specifications subject to color/kelvin chosen. Specifications subject to change without notice; contact us for more information.


ACCESSORIES

Included

1. Mounting Screws
2. 0° Mounting Clip
3. 30° Mounting Clip
4. 45° Mounting Clip
5. 60° Mounting Clip
6. Mounting Magnets
7. Power Cord
8. Silicon End Cap



Dimensions



OEM Conversion Accessories Optional Purchase

9. Hussmann Cord Adapter Plug (DC5M-C7-2-pine Adaptor plug)
10. Hussmann Shelf Adapter Clip (SB-Clip 0° Wide)
11. Hillphoenix Adaptor Plug
12. Hussmann Molex Power Cord (SB-POWER-HUSS-MOLEX)
13. Hussmann Polarity Changing Cord (POLARITY-CONVERTER-CABLE)
14. Kysor Warren LED Power Cord (SB-POWER-KW-TYCO)
15. Power Cord with Bare Wire Lead (SB-POWER-WL36)



Other Accessories Optional Purchase


16. M to F DC 5mm Power Splitter (DC5-81-PS)
17. M to F 39" DC 5mm Extnsn Cord (DC5-MF-EXTEND-39)
18. M to F 8" DC 5mm Extnsn Cord (DC5-MF-EXTEND-8)
19. Rotatable Mounting Clips (2-Pack) (U-BRKT-2PK)
20. U-Bracket Magnet (2-Pack) (U-BRKT-Magnet -2pack)
21. Connector Cord / Jumper (SB-CONNECT)
22. 6" Power Cord (SB-POWER-6)




INSTALLATION

3 Different Ways

- 01** Using pre-installed magnets



- 02** Using Mounting Clips (multiple angles) & Screws (included)

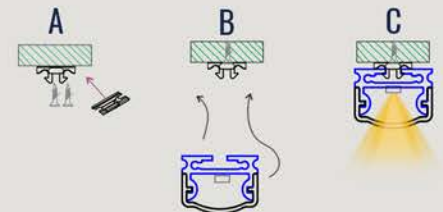

- 03** Using Mounting Clips (multiple angles) & Magnets (included)

