




## TRI•PROOF LED

AC100-277V

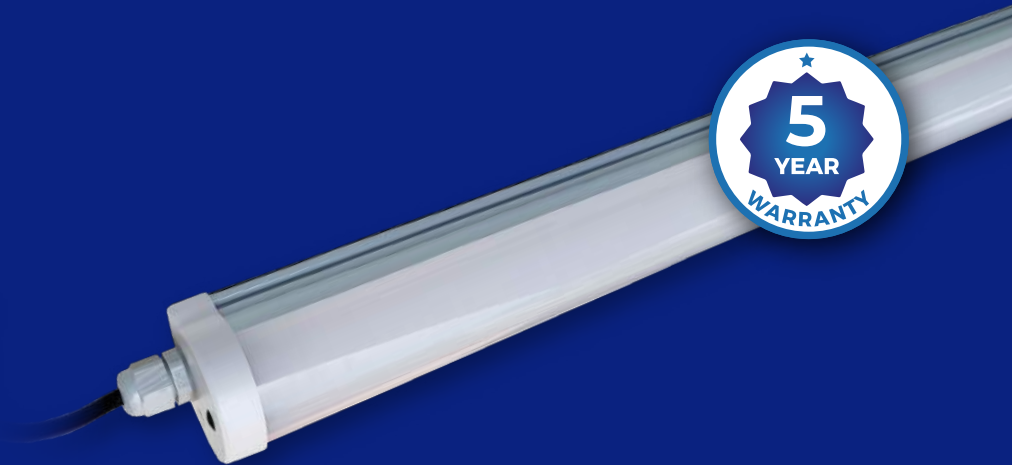

### Easy to Install Connectible Overhead LED Lighting



**Water Proof**

**Dust Proof**

**Corrosion Proof**

**IP68**

#### Built-in Driver / Universal Line Voltage:

Powered with direct line voltage, ensuring quick & easy connection to power.

#### The Perfect Overhead Light Source for:

##### 6000K

- Walk-in Coolers & Freezers In Supermarkets
- Convenience Stores & Liquor Stores
- Beer Caves

##### Platinum

- Grading & Processing Facilities
- Other Cold Storage Rooms


#### Specifications

- Length: 4ft
- Power: 40W
- Fixture Dimension: 47" X 2" X 2"
- Input Voltage: AC100-277V, 50/60HZ
- Direct AC Power
- Power Factor: > 0.95
- Working Temperature: -13°F to -113°F, -25°C to -45°C
- Color Temperature: 6000K, Platinum
- CRI>80






**Exploded view:**

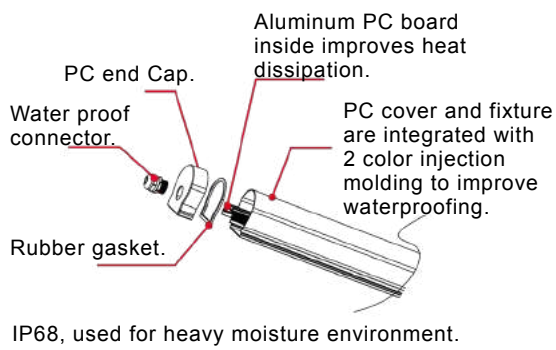


**Connection options:**


1. As shown: the product can have single ended input.

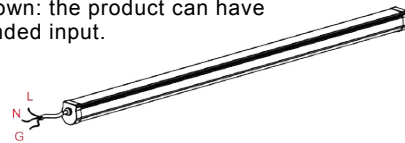

2. When required the luminaires can easily be installed in tandem.

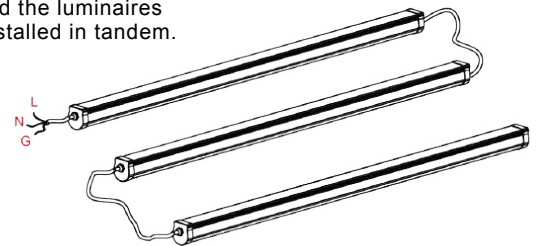

**Installation:**



Easily install the Promolux Tri-Proof LED directly on to the ceiling or wall using the Tri-Proof Quick Clips.



Tri-Proof Quick Clips

**Fixture dimensions:**



4ft • 47" X 2" X 2" | 1200mm X 50mm X 54mm

Size	Model number	Watts	Length (mm)	Length (inches)	Lumens	Lumens per watt	Color
4 ft	PL60-LBP-1200N-40W	40	1200	47	4800	120	6000K
4 ft	PL-LBP-1200N-40W	40	1200	47	4200	105	Platinum

*Specifications subject to change without notice. Contact us for more information.*