

PROMOLUX

TRI-PROOF LED















Waterproof | Dust proof | Corrosion proof

Applications


- Designed for the food processing industry:
- Cold rooms
 - Storage rooms
 - Grading facilities

Built in driver and powered with direct universal voltage.


Product Data

 Length: 1ft - 8ft	 Power Factor: > 0.95
 Lumen: 4800 lm	 Working temperature: -25° C to -45° C
 Power: Check availability on most except 40w	 Lumen Efficacy: 1201 m/w
 Fixture dimension: 47*2*2	 Color temperature: 4000K Platinum Proprietary Promolux chips
 Input Voltage: AC100-277V, 50/60HZ	 CRI > 80
 Direct AC Power	 Lifespan: 50,000 hours@L70


1. Exploded View

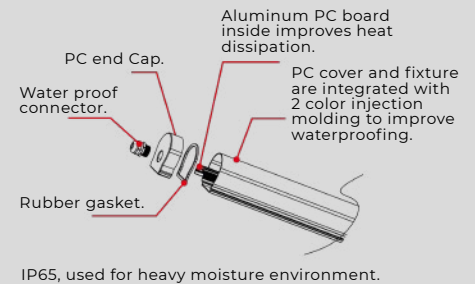


2. Connection mode

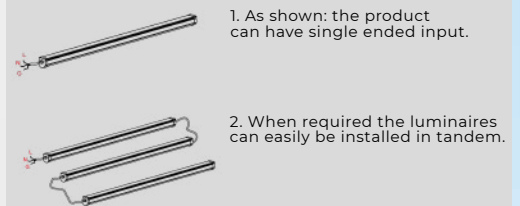

3. Installation

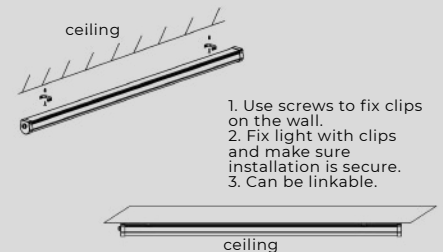

4. Beam Angle

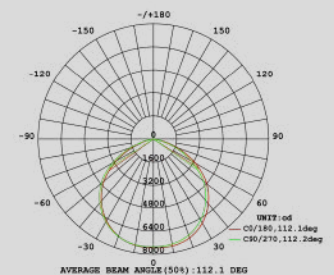

Model: PL-LBP-1200N-40W
PAE 2307 TriProof